



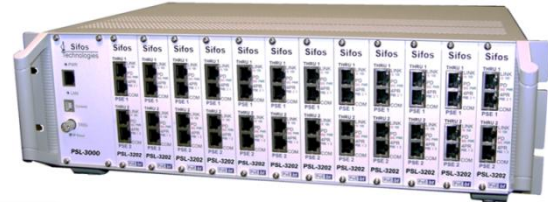

PSL-3000 PowerSync® Programmable Load

IEEE 802.3at & bt Power over Ethernet

Product Overview

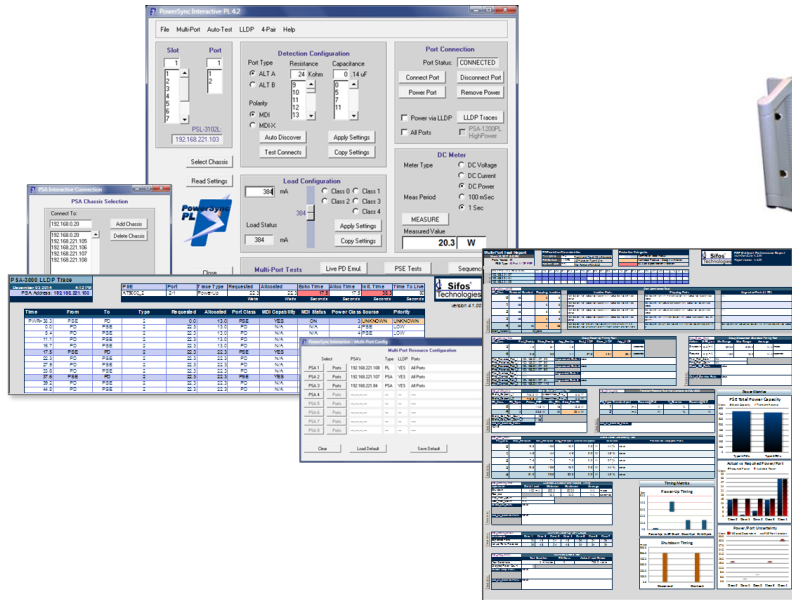

Key Features

- Flexible Multi-Port PD Emulation, PSE Loading, & Measurements
- Unique, Fully Automated Multi-Port PSE System Analysis
- Continuous 2-Pair PSE Loading > 47 Watts Per Port x 24 Ports
- Continuous 4-Pair PSE Loading to > 99 Watts Per Test Blade x 12 Ports
- Hardware / Firmware Ready for IEEE 802.3bt PSE Testing*
- DC Voltage, Current, and Power Metering on 2-Pair and 4-Pair PSE's
- Flexible 802.3at Powered Device LLDP Emulation and LLDP Analysis
- Scalable Features, Cost-Efficient Architecture
- PSA Interactive-PL Graphical User Interface
- Supports PSE Packet Transmission Testing with PoE Loads
- Flexible 4-Pair Signature and Static Load Control
- Smart Fan Control – Runs Cool and Quiet
- High Level Script Automation – Extensively Documented
- Fully Certified Commercial Test Instrument

* When equipped with PSL-3202 test blades

Verification, Simplified.

IEEE 802.3at and 802.3bt PSE's

End-Spans

Mid-Spans

PoE Connectors

Injectors

Fully Automated PSE System Power Management Test

PSE System and Power
Management Verification

System Stability Analysis
including PoE LLDP

PSE Administrative
Responses up to 192*
802.3at PD's or 96* 4-Pair
PD's

Automate QA, Manufacturing

Multi-Port Automation

Ready-to-Use, High
Throughput Test Script

Commercial Test Instrumentation

Fully Certified

Factory Calibrated

Comprehensive Software
and Documentation

Overview

Power-over-Ethernet (PoE) challenges design and test engineers to evaluate multi-channel, "intelligent" DC power sources that are activated and deactivated through signaling protocols operating over several power delivery and polarity configurations. The application and management of DC power over multiple local area network connections must be completely transparent and non-disruptive to the traditional data transmission functions of those network connections.

One Box Solution

Sifos Technologies offers a **one-box solution** to facilitate testing and analysis of **IEEE 802.3at** Power Sourcing Equipment (PSE) behaviors. Each test port inside a PowerSync 3000 Programmable Load is an autonomous and fully isolated instrument offering stimulus and measurement resources. Test ports are configured and controlled via a high level automation interface, **PowerShell PSA**, and may also be rapidly accessed and managed from an intuitive graphical user interface, **PSA Interactive PL**.

Automated 802.3at PSE System Testing

PSL-3000's may be optioned via a license key to run the one-of-a-kind **PSE Multi-Port Suite**. This software offers flexible, programmable, simultaneous **Live PD Emulation** of up to 192 independent Powered Devices including 802.3at Type-2, LLDP capable devices and also supports live emulation of up to 96 pre-802.3bt (or proprietary) 4-Pair PD's. A fully automated second generation **Multi-Port Test Suite for 802.3at** evaluates PSE power allocation decisions and power management behaviors in response to multi-port PD loads including Type-2 PD's that negotiate power using PoE LLDP. Results are presented in colorful graphical reports.

LLDP Emulation for 802.3at

The IEEE 802.3at specification describes a new generation of PSE's and Powered Devices (PD's) that communicate highly resolved power needs and power allocations using Ethernet layer 2 (LLDP) link protocols. The PSL-3000 may be optioned via a license key to flexibly emulate PD's and fully analyze the power negotiation protocols between PSE's and PD's.

Getting Ready for 4-Pair PoE (802.3bt)

PSL-3000's equipped with **PSL-3202** load blades offer capability to emulate future 802.3bt compliant PD's. Under PowerShell Wish or Tcl, users may flexibly emulate 802.3bt PD's that provide user-specified signatures and require user-specified power levels. Emulations include single and dual signatures, multi-event classes, and flexible 4-pair loading to over 99 watts. A rich set of 4-pair load control and metering commands enable early generation 802.3bt PSE analysis today. The PSL-3000 also supports PD emulation and analysis of a variety of pre-standard 4-Pair PSE formats using both PSA Interactive (GUI) and PowerShell PSA software environments.

Cost Effective, Scaleable, and Backward Compatible


The PSL-3000 may be configured with 2 to 24 test ports, or with a fixed 24 test ports (**PSL-3224**) to further reduce per-port cost. Unlike most other low cost PSE load solutions, the PSL-3000 is a **fully certified** and factory calibrated commercial test instrument.

* Assumes up to 8 PSL-3000's combined into
a Multi-Port Resource Configuration.


Verification, Simplified.

PowerSync Programmable Load Test Equipment Setups

PSE Multi-Port System QA, Manufacturing Test

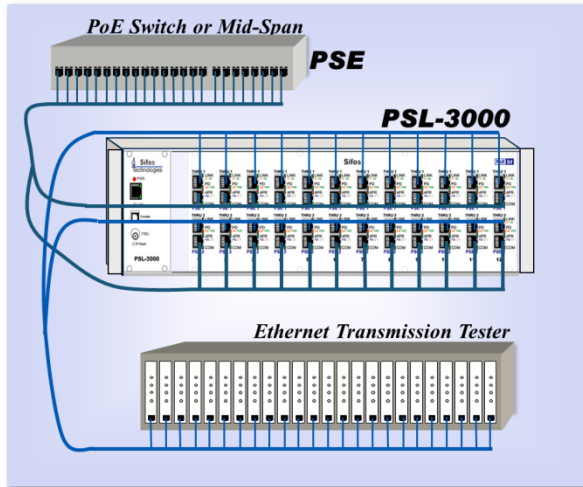

PSE PoE & 10/100/1000 Physical Layer Analysis, PSE DC Unbalance Tolerance

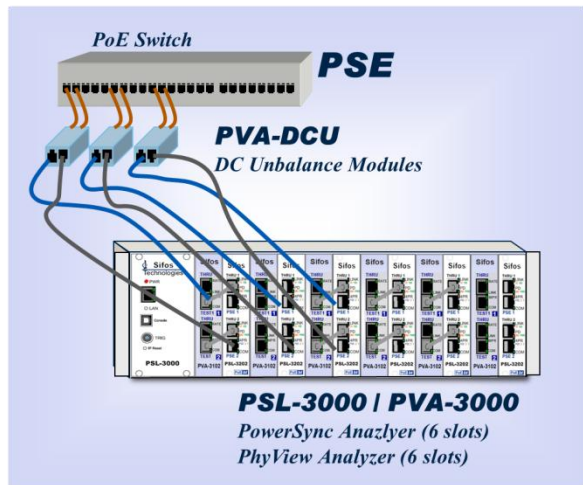

Flexible PD Emulation with Measurements (per Port)

- Flexible 2-Pair & 4-Pair PD Detection & Class Emulation
- Configurable Detection Resistance
- Configurable Detection Capacitance
- Emulate 802.3at Classes 0-4
- Emulate 802.3bt Classes 5-8 and Dual PD Classes 1-5
- Static DC Load Current to 950mA
- Average DC Voltage Measurement
- Average DC Current Measurement
- Average DC Power Measurement
- 4-Pair Loading from Either Port of Each Test Blade

PSE System & Multi-Port Testing*

- Fully Automated Multi-Port Test Suite for Type-1 and Type-2, including Type-2 LLDP PSE's up to 192 PSE Ports
- Power Administration by PD Class and Port Group Subsets
- Group Power-Up, Power Negotiation, and Disconnect Timing
- Static Power Capacity by PD Type
- PD Power Budget Uncertainty by PD Class
- Group Overload Response and Timing
- Power Stress Tolerance
- Programmable Live PD Emulation Up to 192 Simultaneous 802.3at PD's (Type-1, Type-2, with or without LLDP) drawing up to 34 watts each
- Programmable Live PD Emulation Up to 96 Simultaneous Pre-802.3bt 4-Pair PD's (with or without UPoE LLDP) drawing up to 95 watts each

LLDP*, PHY, Transmission Test Support

- Flexible, Per-Port PD 802.3at LLDP Emulation for PoE with Payload, Timing, & Synchronization Control
- Fully Automated 802.3at LLDP Protocol Traces and Analysis
- 802.3at PSE-Side LLDP Emulation and Protocol Traces
- Cisco UPoE PD LLDP Support (PD Emulation)
- Test Port "THRU" Channel for 10/100/1000 PHY Testing (using the Sifos PVA-3000) and Packet Transmission Testing
- Negligible Thru-Channel Impairment (10/100/1000/2.5GBase-T)


Powerful Software

- PSA Interactive GUI for Rapid Setup and Intuitive Manual Testing
- PowerShell Script Automation for Interactive Automated Test Development and Fast Test Execution
- High Throughput, Multi-Port QA/Manufacturing Test Script Included

* Available as an optional feature to the PSL-3000. See feature-specific data sheet.

PSA Interactive Graphical User Interface

The **PSA Interactive** Programmable Load Graphical User Interface (GUI) is an intuitive tool designed to allow user quickly to setup load configurations and perform measurements on IEEE 802.3at compliant and emerging 4-Pair power sourcing equipment (PSE). PSA Interactive provides an intuitive view of the full range of testing resources available within the PowerSync Programmable Load. Users can quickly harness the flexibility and power of these resources to set up load configurations, perform measurements, and to prototype sequences that will eventually be automated in PowerShell PL scripts.

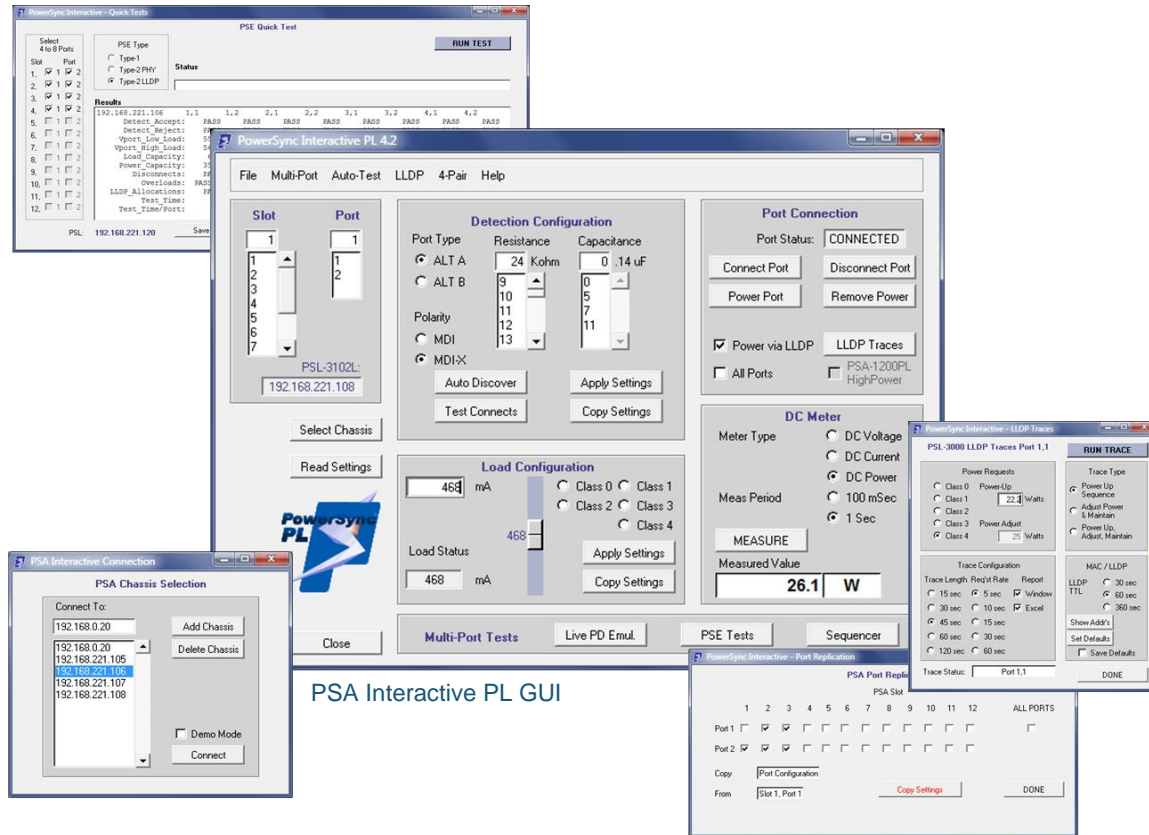

PSA Interactive PL GUI

PSA Interactive offers intuitive controls for:

- Chassis & Port Selection
- Port Configuration (ALT A/B, Polarity MDI/MDI-X, 802.3at Detection Signatures)
- Replication of Settings Across Multiple Ports
- Automated 802.3at ALT/Polarity Discovery
- Single or Multi-Port PD Connect, Disconnect, Power-Up, and Power-Down
- Static Load Control
- PD Classification and One Button Single or Multi-Port PD Power-Up Emulation
- One Button PD LLDP Emulation and Protocol Testing
- Average DC Voltage, DC Current, and DC Power Measurements
- Multi-Port Live PD Emulation (*Using up to 8 PSL's*)
- PSE Multi-Port Tests for 802.3at PSE's (*Using up to 8 PSL's*)
- PSE Multi-Port Test Sequencer for 802.3at PSE's (*Using up to 8 PSL's*)
- Pre-802.3bt 4-Pair PSE Signature / Load Configurations and Metering
- PSE LLDP Emulation / Testing
- "Quick-Test" PSE Fast Multi-Port 802.3at PSE Verification

PoE LLDP Emulation and Analysis

The PSL-3000 includes a subsystem designed to flexibly emulate LLDP capable 802.3at PD's on a per test port basis. Fully automated tools enable capture and analysis of protocol and protocol timing between the PSE and the PD.

Time	From	To	Type	Requested	Allocated	Post Class	MTU Capability	MTU Status	Power Class	Source	Priority
0.0	PSE	PD	2	12.0	12.0	PSE	YES	ON	4	PRIMARY	LOW
0.0	PD	PSE	2	20.3	13.0	PD	N/A	N/A	4	PSE	LOW
2.1	PSE	PD	2	20.3	20.3	PSE	YES	ON	4	PRIMARY	LOW
3.9	PD	PSE	2	20.3	20.3	PD	N/A	N/A	4	PSE	LOW
5.9	PSE	PD	2	20.3	20.3	PSE	YES	ON	4	PRIMARY	LOW
12.0	PSE	PD	2	20.3	20.3	PSE	YES	ON	4	PRIMARY	LOW
14.0	PD	PSE	2	20.3	20.3	PD	N/A	N/A	4	PSE	LOW
16.3	PSE	PD	2	20.3	20.3	PSE	YES	ON	4	PRIMARY	LOW
24.5	PD	PSE	2	20.3	20.3	PD	N/A	N/A	4	PSE	LOW
26.8	PSE	PD	2	20.3	20.3	PSE	YES	ON	4	PRIMARY	LOW
34.9	PD	PSE	2	20.3	20.3	PD	N/A	N/A	4	PSE	LOW
37.5	PSE	PD	2	20.3	20.3	PSE	YES	ON	4	PRIMARY	LOW
42.2	PSE	PD	2	20.3	20.3	PSE	YES	ON	4	PRIMARY	LOW

See Sifos datasheet, **LLDP Emulation and Analysis Overview**, for further information on this topic.


PSE Multi-Port Suite

LLDP Protocol Trace

While IEEE 802.3at describes a PSE as a single port device, most PSE's are multi-port systems such as Ethernet switches. This fact leads to the need for system test methods and tools to assess PSE behavior across a multitude of ports. The **PSE Multi-Port Suite** offers two fundamental testing capabilities that address this need.

Multi-Port PD Emulation turns every PSL-3000 test port into an emulated Powered Device where behaviors such as static power load, PD classification, line power loss, and even PoE LLDP protocol characteristics are modeled simultaneously across as many as 192 PSA ports. Type-1 ($\leq 13W$) and Type-2 ($\leq 25.5W$) PD's may be emulated. See Sifos datasheet, **Multi-Port Live PD Emulation Overview**, for further information on Live PD Emulation.

The **Multi-Port Test Suite** is a set of fully automated tests and reporting that takes the PSL-3000 into the realm of fully automated 802.3at PSE System Power Management and Multi-Port Stimulus-Response testing. The Multi-Port Test Suite assesses system-wide behaviors only observable when many IEEE 802.3at PD's are powered by a PSE. The test suite will acquire and distill information regarding key behaviors of a PSE including **class-based power administration**, multi-port **LLDP granting**, power-up and LLDP grant timing, **static power** capacity, power down behavior, power-per-port **uniformity and uncertainty**, and power **stress test** analyses. Results are presented in colorful, graphical spreadsheet reports. See Sifos datasheet, **Multi-Port 2 Test Suite Overview**, for further information about this test suite.

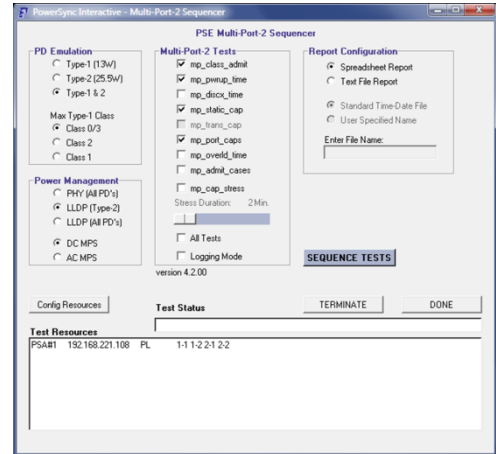

Multi-Port Test Suite Sequencer Menu

PowerShell PSA Tcl/Tk Interface


The PowerShell PSA Scripting Environment provides a high level, interactive means to control and program automated test sequences for the PSA-3000 PowerSync Analyzer. PowerShell enables fully automated testing suites that span multiple ports, blades, and instruments. Built upon the popular Tool Command Language (Tcl), it offers an extensive and extensible programming language well suited for automated testing.

PowerShell PSA provides a complete API for the PSL-3000 including high level commands that **emulate 802.3at / 802.3bt* PD Power-Ups**, execute **LLDP Protocol Traces**, and execute or sequence **Multi-Port System** tests. PowerShell commands access all of the resources of the PSL-3000 and enable the rapid development of highly customized test scripts. PowerShell fully supports off-line script development and debug through its robust built-in demo mode.

PowerShell PSA libraries can be integrated into broader Tcl environments that interlace traditional network transmission tests with Power-over-Ethernet tests. This enables seamless integration of custom or standard PSE tests with existing Tcl-based test suites.

Other features offered by the PowerShell PSA environment include:

- Interpretive command execution (no compilation, simple debug)
- Simple, intuitive PowerSync PL commands (API)
- Integrated and extensive command "help" features

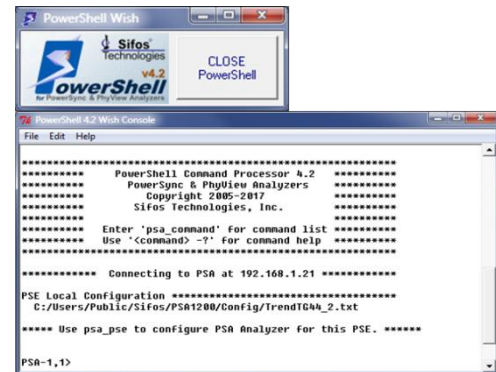

PowerShell Wish Console

* When equipped with PSL-3202 test blades

- Upward compatible to PSA-3000 platforms
- Fast test execution speeds
- Script-configured test report files
- Notepad++ Editor Extension for PowerShell PSA
- Command-Knowledgeable Wish Console or Traditional Tcl Command Console

Multi-Port High Throughput PSE Verification

The PSL-3000 and PSL-3024 are provided with a sample PSE automated test script, **psl_quick_test**, that recovers critical PoE parameters from PSE ports with an effective test throughput of less than 30 seconds per tested port. This application can be used as is, or with user modifications, in both QA and manufacturing test to rapidly qualify PSE functional performance.

Important features of the **psl_quick_test** include:


- **Source Code Provided:** May be used as is, may be modified, or may be used as template script
- Scans 4 to 8 PSE ports per test cycle
- Tests **Type-1**, **Type-2 (2-event)**, and **Type-2 (LLDP*)** PSE's
- Validates PoE **Detection Acceptance** and **Rejection** Ranges
- Measures PSE **Port Voltage** at minimum and maximum load conditions
- Determines **Power Capacity** in Watts and mA
- Assesses **Disconnect Power Removal** response
- Assesses **Overload Power Removal** and Power-Type Threshold
- Assesses **LLDP Power Allocations***

Typical test times will range from 20 to 30 seconds per port tested, even when testing Type-2 LLDP capable PSE's.

```
PSA-1,1>psl_quick_test 1,1 1,2 2,1 2,2 3,1 3,2 4,1 4,2 type-2 ll dp
TESTING WITH 192.168.221.120 ON PORTS 1,1 1,2 2,1 2,2 3,1 3,2 4,1 4,2
EVALUATING DETECTION REJECT SIGNATURES...
EVALUATING DETECTION ACCEPT, LOW LOAD Vport, AND DISCONNECTS...
EVALUATING DETECTION ACCEPT, HIGH LOAD Vport, CAPACITY, & OVERLOADS...
ASSESSING LLDP POWER-UPS...
REQUESTING FULL TYPE-2 POWER...
ASSESSING LLDP ALLOCATIONS...

192.168.221.120    1,1    1,2    2,1    2,2    3,1    3,2    4,1    4,2
Detect_Accept:   PASS    PASS    PASS    PASS    PASS    PASS    PASS    PASS
Detect_Reject:   PASS    PASS    PASS    PASS    PASS    PASS    PASS    PASS
Vport_Low_Load:  53.3    53.4    53.3    53.4    53.4    53.3    53.8    53.4
Vport_High_Load: 52.2    52.4    52.2    52.4    52.3    52.2    52.7    52.4
Load_Capacity:   655     655     655     655     655     645     650     650
Power_Capacity:  34.2    34.3    34.2    34.3    34.3    33.7    34.3    34.1
Disconnects:     PASS    PASS    PASS    PASS    PASS    PASS    PASS    PASS
Overloads:       PASS-2  PASS-2  PASS-2  PASS-2  PASS-2  PASS-2  PASS-2  PASS-2
LLDP_Allocations: PASS    PASS    PASS    PASS    PASS    PASS    PASS    PASS
Test_Time:       220.0    seconds
Test_Time/Port:  27.5     seconds
```

Automated Manufacturing/QA PowerShell Test Script, **psl_quick_test**

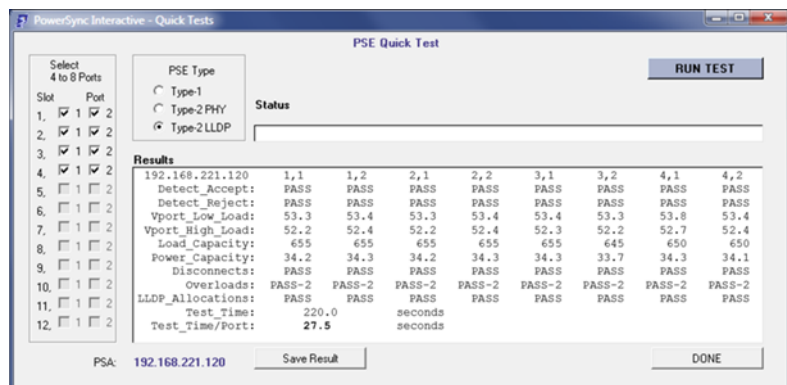

* LLDP PSE testing requires PoE LLDP Emulation and Analysis feature.

PSL Quick Test in PSA Interactive PL

802.3bt Powering Emulations & Analysis

The PSL-3000 with **PSL-3202** test blades is hardware and firmware ready for IEEE 802.3bt PSE testing and PD emulation. Features for analysis of 802.3bt PSE's include:

- 4-Pair Loading from **Either** Port 1 or Port 2
- Emulate 802.3bt **Single** and **Dual Detection** Signatures
- Accurately Emulate 802.3bt **Class 5, 6, 7, and 8 Single Signature** PD's with 4-Pair Loading Over 99 Watts per Load Blade (Up to 12 load blades per PSL chassis)
- Accurately Emulate 802.3bt **Dual Class 1, 2, 3, 4, and 5 Signature** PD's with Class and Load Defined per Pairset
- Accurately Emulate 802.3bt **Pair Unbalance** Loads from 0% to 100%
- Emulate 802.3bt **Auto-Class** Signatures and Loading
- Reliable Multi-Event Edge Transition De-bouncing



Loading 802.3bt PSE Ports

Each of these features are available in PowerShell PSA version 4.2 (see above). Over time, they will be incorporated into PSA Interactive PL and eventually into fully automated test suites and Live PD Emulation for 802.3bt. Additionally, LLDP will be extended to support PoE LLDP extensions associated with the 802.3bt standard.

The powering sequences here depict two 802.3bt emulated power-ups performed using a single command, **power_bt** in PowerShell PSA. One power-up is an emulated 802.3bt Class 8 PD drawing 88.6 watts while the second power-up emulates an 802.3bt dual Class 4 PD that draws 56.2 watts at the PSE.

The Class 8 emulation is followed by 4-pair power and load current measurements, voltage measurements on each pairset, then a 4-pair load adjustment to 65.6 watts followed by another 4-pair total power measurement.



```
PowerShell 4.2 Wish Console
File Edit Help
PSA-1,1>power_bt 2,2 c 8 p 88.6
POWERED Alt-A: 54.8 U 805.0 mA Alt-B: 54.7 U 807.0 mA
PSA-2,2>paverage_2 2,2 period 1s stat
Slot 2
Average Power= 88.8 Watts
PSA-2,2>idcoverage_2 2,2 stat
Slot 2
READY
1612.0 mA
PSA-2,2>vdcaverage 2,1 stat
Slot,Port 2,1
READY
54.7 volts
PSA-2,1>vdcaverage 2,2 stat
Slot,Port 2,2
READY
54.8 volts
PSA-2,2>psa_set_4pair_load 2,2 p 65.6
PSA-2,2>paverage_2 2,2 stat
Slot 2
Average Power= 65.8 Watts
PSA-2,2>
```

Emulated Class 8 PD Power-Up to 88.6 Watts

```
PowerShell 4.2 Wish Console
File Edit Help
PSA-2,2>
PSA-2,2>power_bt 2,1 c 4D p 56.2
POWERED Alt-A: 55.4 U 510.0 mA Alt-B: 55.2 U 509.0 mA
PSA-2,1>ioload_2 2,1 ia 420 ib 375
PSA-2,1>paverage 2,1 stat
Slot,Port 2,1
Average Power= 20.8 Watts
PSA-2,1>paverage 2,2 stat
Slot,Port 2,2
Average Power= 23.5 Watts
PSA-2,2>psa_disconnect 2,2
PSA-2,2>paverage 2,1 stat
Slot,Port 2,1
Average Power= 0.0 Watts
PSA-2,1>psa_4pair_disconnect
PSA-2,1>
```

Emulated Dual-Class 4 PD Power-Up to 56.2 Watts

The dual Class 4 PD power-up is followed by load current adjustments to different load levels on each pair set, namely 420mA on Alt-A, 375mA on Alt-B. This leads to different power loads of 20.8 watts and 23.5 watts respectively.

When the Alt-A pairset at PSL test port 2,2 is disconnected and therefore draws no load, the Alt-B pairset at PSL test port 2,1 is also observed to power down in this example.

Technical Data: PSL-3000 & PSL-3024

LAN Interface Specifications			
Operating Mode	Signal Path	Parameter	Specification
Data Through Mode	PSE-# to OUT-#	Connections	RJ45
		Data Rates and Signaling	10/100/1000BaseT/2.5GBaseT 5GBase-T, 10GBase-T with minor impairment
		Latency	None - Passively Coupled
		Impedance	100Ω, Balanced
		Pair-Pair Isolation	≥ 36dB @ 100MHz
		Insertion Loss	≤ 2dB, 0.1MHz to 100 MHz
		Insertion Loss Variation	≤ 0.75dB, 0.1MHz to 100 MHz
		Return Loss (OUT pairs terminated into 100Ω)	≤ -24dB, 1MHz to 100MHz
Data Connect (LLDP Emulation) Mode	PSE-# to Blade Transceiver	Connection	RJ45
		Data Rate and Signaling	10/100Base-T
		Orientation	MDI End Point
		Protocol	802.1ab, 802.3bc, 802.3at
		Impedance	100Ω, Balanced
		Return Loss	≤ -20dB, 1MHz to 100MHz

PoE Port Connections			
Operating Mode	Dependency	Parameter	Selections
2-Pair Power	Port 1 and Port 2 operate independently	Powered Pair	ALT-A or ALT-B
		Polarity	MDI or MDI-X
4-Pair Power: PSL-3202	Connect to Port 1 (Port 2 disabled) or Connect to Port 2 (Port 1 disabled)	ALT-A Polarity (Port 2)	MDI or MDI-X
		ALT-B Polarity (Port 1)	MDI or MDI-X
		Detection Signature Type	Single (Port 1) or Dual (Port 1 and Port 2)
4-Pair Power: PSL-3102	Connect to Port 2 (Port 1 disabled)	ALT-A Polarity (Port 2)	MDI or MDI-X
		ALT-B Polarity (Port 1)	MDI or MDI-X

Detection and AC MPS Specifications			
Description	Conditions	Parameter	Specification
Detection Resistance	Vport = 2.5VDC - 12VDC, Port Connected	Range	9 KΩ to 39 KΩ
		Resolution	1 KΩ
		Accuracy vs Setting $\Delta V / \Delta I$ at 4.5 Volt Spacing	±1.75% + 300Ω
Detection Capacitance	Vport = 2.5VDC - 12VDC, Port Connected	Range	0.14, 5, 7, 11μF
		Accuracy	±15%
Detection Signature Cut-Off Threshold	Port Connected	Vport	12V ± 2%
AC MPS Signature	Vport = 12VDC - 60VDC, Port Connected	AC Impedance	24KΩ (0.1μF + 330Ω)
		Resistance Accuracy $\Delta V / \Delta I$ at 2 Volt Spacing	22.8KΩ ± 250Ω
	Port Isolated	AC Impedance (≤ 500 Hz)	≥ 1.1 MΩ
		AC Impedance (≤ 120 Hz)	≥ 3.0 MΩ

Current Load Specifications			
Description	Conditions	Parameter	Specification
Load Current	Per Powered Pair	Range	PSL-3202: 0 to 950 mA PSL-3102: 0 to 750 mA
		Resolution	1.00 mA

Current Load Specifications			
Description	Conditions	Parameter	Specification
		Accuracy	± (0.5% setting + 1 mA)
		Slew Rates	> 4mA / μsec
		Activation Voltage	15V, Rising Vport
		De-Activation Voltage	14V, Falling Vport
Multi-Event Classification <i>(Not available to PSL-3102)</i>	Multi-Event Activated, Vport > 15VDC	802.3bt Signatures Emulated	Single Signature Class 5 - 8 Dual Signature Class 1 - 5
		Non-Standard Signatures	Class Current per Event
		802.3bt Auto-Class	2mA @ 80msec of LCE1
		Multi-Event Activation	psa_connect or mclass
		Multi-Event Deactivation	psa_disconnect or mclass
		Multi-Event Timeout	100 msec @ > 15V
		Event Start Glitch De-bounce	150μsec
		Mark and Idle Transition Glitch De-bounce	500μsec
		Event Count Reset Condition	< 4.5V for > 500μsec
		Power-On Expiration (default)	115 msec

DC Metering Specifications			
Description	Conditions	Parameter	Specification
Voltage Meter	Average	Voltage Range	0 - 60V
		Sample Averaging	256 Samples
		Sample Rate (100 msec Period)	390 msec
		Sample Rate (1 sec Period)	3.9 msec
		Resolution	100 mV
		Accuracy ¹	± (2% reading + 100mV)
Current Meter	Average	Current Range	0 – 1000 mA
		Sample Averaging	256 Samples
		Sample Rate (100 msec Period)	390 msec
		Sample Rate (1 sec Period)	3.9 msec
		Resolution	1.00 mA
		Accuracy ²	± (2% reading + 1.0 mA)

- Does not include Voltage drop due to cable losses and 0.45Ω maximum test port input resistance.
- Does not include Port-Connected MPS current, which is approximately (Vport - 12V)/24kΩ.

LED Indicators		
LED Label	Parameter	Description
LINK	LLDP Link Status & Activity	GREEN: Linked at 100Base-Tx for LLDP, Blink with Activity AMBER: Linked at 10Base-T for LLDP, Blink with Activity OFF: Unlinked (or Disconnected)
PD	PoE Power Status	GREEN: PSE powered with Vport > 36 VDC AMBER: Valid 802.3 Detection Signature Connected (No PSE Power) OFF: PSE not powered & PD signature not connected
4PR	Test Port Mode	GREEN: Test port configured for 4-Pair powering AMBER: Opposite test port configured for 4-Pair powering OFF: Test port configured for 2-Pair powering
COM	Communications	ON: Indicates active communications with test port

For PSL-3102 LED Indicators, see Section 2 of PSL-3000 Technical Reference Manual.

Programming and Control	
Description	Specification
Interface	Ethernet 10/100BaseT
Host Requirements	PC running Microsoft Windows XP, Vista, 7, 8, 10, or Linux PC (Fedora, SUSE, Debian)
Control Environment	Sifos PowerShell PSA or PSA Interactive PL
Recommended Network Latency:	< 20 msec

Physical and Environmental	
Description	Specification
Dimensions	19"W x 5.25"H x 12"L (3U Rack Mount)
Weight	20.4 lbs. (Fully Populated with PSL-3x02 Cards)
Power	100VAC-240VAC, 50-60 Hz, 1.35A Max.
Ambient Operating Temperature	0°C to 40°C (≤ 100W combined PoE loading per test blade or 50W per test port)
Storage Temperature	-20°C to 85°C
Operating Humidity	5% to 95% RH, Non-Condensing.

Certifications		
Description	North America	Europe & International
Emissions	FCC Part 15, Class A	Meets EN55011 VCCI, AS/NZS 3548, ICES-001
Safety	CSA Listed (CSA22.2 No. 61010)	Meets EN61010-1 CB Scheme IEC 61010-1
General Certification		Low Voltage Directive (2014/35/EU) Electromagnetic Compatibility Directive (2014/30/EU) CE Marking Directive (93/68/EEC)
<p>FCC Statement: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.</p>		

Ordering Information

PSL-3000, PowerSync Programmable Load 3000 Chassis and Controller including PowerShell PSA and PSA Interactive-PL Software

PSL-3202, Dual Port PSE Load Blade for IEEE 802.3at, IEEE 802.3bt, and Pre-802.3bt 4-Pair Testing

PSL-3224, PowerSync Programmable Load 3000 Chassis and Controller including 12 PSL-3202 Load Blades, PowerShell PSA, and PSA Interactive-PL Software

PSL-LLDP, LLDP Emulation and Analysis Feature for One PSL-3000 Instrument

PSL-MPT, PSE Multi-Port Test Suite for One PSL Instrument (Up to 24 Test Ports)

Accessories Included:

- Installation Guide & Configuration Chart
- PowerSync Analyzer Reference Manual (Binder and CD)
- Power Cord
- Cross-Over Ethernet Cable
- RS-232 or USB Cable

Sifos Technologies, Inc.
1061 East Street
Tewksbury, MA 01876
+1 (978) 640-4900
www.sifos.com
sales@sifos.com

Verification, Simplified.